




SRW JOINT SET

SRW Joint Set is a specially formulated sand stabilizer designed for interlocking pavers. It increases the strength and prevents washout of joint sand. Joint Set comes premixed or concentrated, making it easy for both residential or commercial use.

- Prevents washout of sand
- Increases strength of pavement
- Blocks weed growth
- Protects against ant infestation
- Comes in 65lb. Premix (Tan, Granite & HP), 1 lb. Concentrated
- Waterproof
- Environmentally friendly
- Easy maintenance
- Easy cleanup

DIRECTIONS

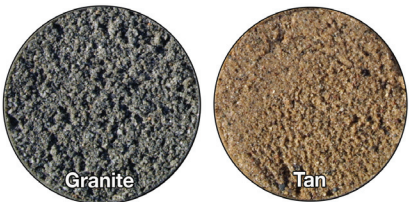

Premix Sand Colors

1 LB. CONCENTRATE BAG

1. Mix 1 lb SRW Joint Set™ with 50 lbs of dry joint sand and mix thoroughly.

JOINT SET PREMIX

1. Due to possible settling during shipping, we recommend gently tumbling contents before opening the bag.

CONTINUE FOR CONCENTRATE OR PREMIX

2. Spread mixture (Joint Set and sand or Premix) evenly over paved surfaces. Pavers need to be dry to prevent mixture from sticking to the surface.
3. Using a push broom, completely cover paver surface with a thin layer of mixture using a sweeping, pounding motion.
4. Run a plate compactor over the pavers in overlapping passes.
5. Sweep in more of the mixture and compact again. Repeat until joints are full and sand can no longer be vibrated into them.
6. Blow entire pavement clean with a leaf blower (or sweep) to remove mixture from the surfaces. Leftover mixture can be stored in an airtight container.
7. Saturate area with water using low pressure to activate mixture, making sure the joints are completely saturated. Allow water to soak into the joints (approximately 15 minutes) and saturate area again for a deeper penetration.
8. Allow 24 hrs of dry weather for setup before allowing traffic on the surface.

Cleanup • Depending on severity it may be cleaned off with water and brushing. Pressure washer may be used on pavers only (do not spray newly set joints).

USER TIPS

- Sand and surfaces must be dry. Do not apply at a temperature below 50°F (10°C) or above 80°F (27°C).
- Surfaces must be clean and free from oil, grease, water (no rain or standing water), dust and any loose material. If necessary, clean prior to application with **SRW (CD) Paver Cleaner/Degreaser**.
- For best results, pavers must have positive drainage and be properly installed.
- Never leave dry mixture residue on any surface.
- Do not use high pressure when saturating area. High pressure could washout unset sand and stabilizer.
- Recommend sealing 90 days after installation using **SRW Paver Sealer**. On new pavement, it may be necessary to remove efflorescence using **SRW (EF) Efflorescence Cleaner**.

Coverage for 1 lb concentrate • 100 - 125 square feet, coverage depends on joint width. This product is not recommended for large joints.

Coverage for 65lb premix • 65 - 85 square feet, coverage depends on joint width. This product is not recommended for large joints.

PACKAGING

PART NUMBER	SIZE	# PER CARTON OR PALLET	LBS
Premix SSAN PRE	65 lb bag	1/each; 42/pallet	65/each 2770/pallet
Concentrate Bag SSAN CTN	1# Bag	20/carton	21/carton

WARNINGS

Important Notice:

Since the use of this product is beyond the control of the manufacturer, no guarantee or warranty, expressed or implied is made for the merchantability, fitness or suitability for the use of this product or otherwise extending beyond the description hereof except the obligation to replace that product for portion of shipment proved defective. Furthermore, nothing contained herein shall be construed as a recommendation to use any product in conflict with existing laws and/or patents covering any material or use. Liability is limited to product replacement only.